

Effortless Wheel

Elastic Natural Rubber Wheels with
a Nylon Center


Key Attributes Include:

- Support loads up to 880 lb
- With or without bearings
- Low rolling resistance
- Virtually no noise
- Safe for all floor types

Elastic Natural Rubber Wheel



Bearing Options

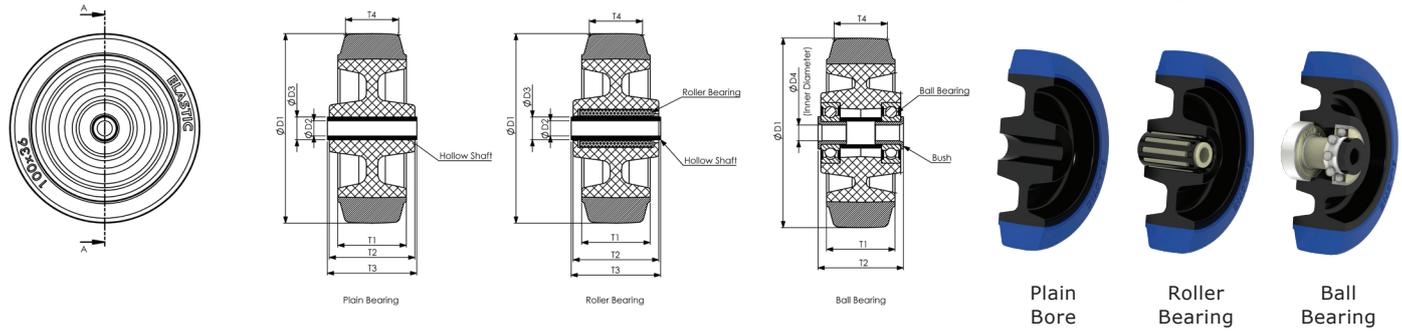

Temperature Resistance -20 to +70 °C	Noise Emission Very good	<ul style="list-style-type: none"> • 67 +/- 3 Shore A • High quality natural rubber • Impact resistant nylon hub • Hub and ring color options • Ergonomic design
Rolling Resistance Very good	Floor Protection Very good	

Wheel Size	EEC 3"	EEC 3"	EEC 4"	EEC 4"	EEC 5"	EEC 5"	EEC 6"
Dimensions	Inches & lb.	Inches & lb.					
Type	Plain Bore	Roller Bearing	Plain Bore	Roller Bearing	Plain Bore	Roller Bearing	Roller Bearing
Outer diameter (D1)	3 - 1/8"	3 - 1/8"	3 - 15/16"	3 - 15/16"	4 - 15/16"	4 - 15/16"	5 - 14/16"
Bore diameter (D3) <i>(Without hollow shaft)</i>	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	13/16"
Bore diameter (D2) <i>(With hollow shaft)</i>	5/16"	5/16"	5/16"	5/16"	5/16"	5/16"	1/2"
Wheel width (T1)	1 - 3/8"	1 - 3/8"	1 - 7/16"	1 - 7/16"	1 - 7/16"	1 - 7/16"	1 - 15/16"
Hub length (T2) <i>(Without hollow shaft)</i>	1-9/16" or 1-3/4"	2-3/8"					
Hub length (T3) <i>(With hollow shaft)</i>	1 - 5/8" or 1 - 7/8"	2-3/8"					
Tire tread width (T4)	1"	1"	1 1/8"	1 1/8"	1-1/8"	1-1/8"	1-5/8"
Load bearing Capacity	220	220	330	330	380	380	660

Wheel Size	EEC 6"	EEC 6 5/16"	EEC 6 5/16"	EEC 7"	EEC 7"	EEC 8"	EEC 8"
Dimensions	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.
Type	6204ZZ C3	Roller Bearing	6204ZZ C3	Roller Bearing	6204ZZ C3	Roller Bearing	6204ZZ C3
Outer diameter (D1)	5-14/16"	6-5/16"	6-5/16"	7-1/16"	7-1/16"	7-14/16"	7-14/16"
Bore diameter (D3) <i>(Without hollow shaft)</i>	-	13/16"	-	13/16"	-	13/16"	-
Bore diameter (D2) <i>(With hollow shaft)</i>	-	1/2"	-	1/2"	-	1/2"	-
Bore diameter (D4) <i>(Ball bearing with bushing)</i>	8/16"	-	8/16"	-	8/16"	-	8/16"
Wheel width (T1)	1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"
Hub length (T2) <i>(Without hollow shaft)</i>	2-3/8"	2-3/8"	2-3/8"	2-3/8"	2-3/8"	2-3/8"	2-3/8"
Hub length (T3) <i>(With hollow shaft)</i>	-	2-3/8"	-	2-3/8"	-	2-3/8"	-
Tire tread width (T4)	1-5/8"	1-5/8"	1-5/8"	1-5/8"	1-5/8"	1-5/8"	1-5/8"
Load bearing Capacity	660	770	770	820	820	880	880

Load capacity tested according to EN12532 standard

STELLANA.COM | INFO@STELLANA.COM

No: 371, Colombo Road, Bokundara, Piliyandala, PC 10300, Sri Lanka
 PHONE: +94 11 4212722 | FAX: +94 11 2518525

