

Effortless Wheel

Elastic Natural Rubber Wheels with
a Nylon Center


Key Attributes Include:

- Support loads up to 400 kg
- With or without bearings
- Low rolling resistance
- Virtually no noise
- Safe for all floor types

Elastic Natural Rubber Wheel



Bearing Options

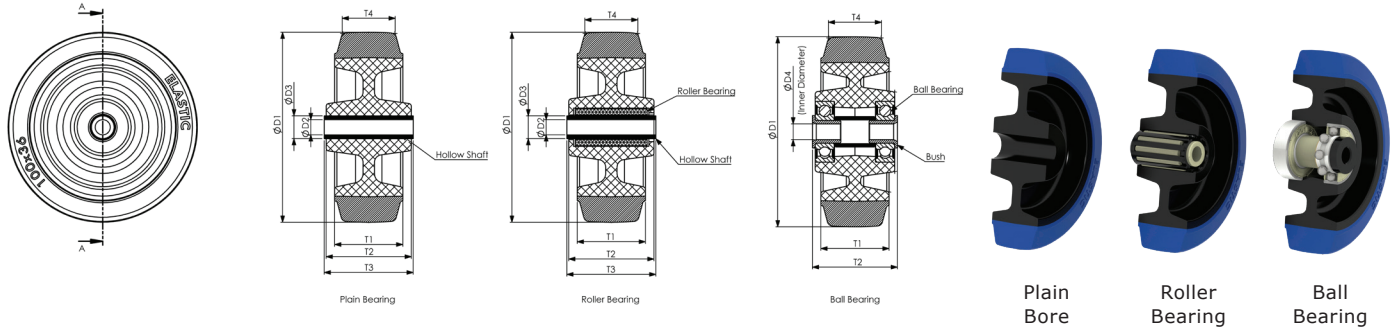

Temperature Resistance -20 to +70 °C	Noise Emission Very good	<ul style="list-style-type: none"> • 67 +/- 3 Shore A • High quality natural rubber • Impact resistant nylon hub • Hub and ring color options • Ergonomic design
Rolling Resistance Very good	Floor Protection Very good	

Wheel Size	EEC 80	EEC 80	EEC 100	EEC 100	EEC 125	EEC 125	EEC 150
Dimensions	mm & kg	mm & kg	mm & kg	mm & kg	mm & kg	mm & kg	mm & kg
Type	Plain Bore	Roller Bearing	Plain Bore	Roller Bearing	Plain Bore	Roller Bearing	Roller Bearing
Outer diameter (D1)	80	80	100	100	125	125	150
Bore diameter (D3) <i>(Without hollow shaft)</i>	12	12	12	12	12	12	20
Bore diameter (D2) <i>(With hollow shaft)</i>	8	8	8	8	8	8	12
Wheel width (T1)	35	35	36	36	36	36	50
Hub length (T2) <i>(Without hollow shaft)</i>	40 or 45	40 or 45	40 or 45	40 or 45	40 or 45	40 or 45	60
Hub length (T3) <i>(With hollow shaft)</i>	42 or 47	42 or 47	42 or 47	42 or 47	42 or 47	42 or 47	61
Tire tread width (T4)	26	26	28	28	28	28	42
Load bearing Capacity	100	100	150	150	175	175	300

Wheel Size	EEC 150	EEC 160	EEC 160	EEC 180	EEC 180	EEC 200	EEC 200
Dimensions	mm & kg	mm & kg	mm & kg	mm & kg	mm & kg	mm & kg	mm & kg
Type	6204ZZ C3	Roller Bearing	6204ZZ C3	Roller Bearing	6204ZZ C3	Roller Bearing	6204ZZ C3
Outer diameter (D1)	150	160	160	180	180	200	200
Bore diameter (D3) <i>(Without hollow shaft)</i>	-	20	-	20	-	20	-
Bore diameter (D2) <i>(With hollow shaft)</i>	-	12	-	12	-	12	-
Bore diameter (D4) <i>(Ball bearing with bushing)</i>	12	-	12	-	12	-	12
Wheel width (T1)	50	50	50	50	50	50	50
Hub length (T2) <i>(Without hollow shaft)</i>	60	60	60	60	60	60	60
Hub length (T3) <i>(With hollow shaft)</i>	-	61	-	61	-	61	-
Tire tread width (T4)	42	42	42	42	42	42	42
Load bearing Capacity	300	350	350	375	375	400	400

Load capacity tested according to EN12532 standard

STELLANA.COM | INFO@STELLANA.COM

No: 371, Colombo Road, Bokundara, Piliyandala, PC 10300, Sri Lanka
 PHONE: +94 11 4212722 | FAX: +94 11 2518525

